



Peak Demand SureProtect™ Fuse Links

Applications

Peak Demand SureProtect™ fuse links can be used in various applications which require over-current protection for distribution systems assets and equipment like pole mount transformers and capacitor banks.

Protection and Precision

Each fuse is designed to match commonly used fuse curves. This ensures that fuses only operate when needed to protect downstream assets. This reduces unnecessary outages which increase operation and maintained costs.

Construction and Quality

The production facility maintains the strictest quality standards and maintains ISO 9001 certification. Additionally, an onsite laboratory is used for both development and quality verification by sample testing fuses continuously.

Fuse Curves and Reports

Fuse curves available upon request.

Specifications

Available types: K, T

Standards: Designed in according with ANSI standards

Head design: Removable

Features: High mechanical strength, arc extinguishing insulating tube

Cross Reference

Eaton/Cooper Kearney™ Fit-All™ - Type K and Type T

Eaton/Cooper Edison™ - Type K and Type T

Hubbell Chance - Type K Links and Type T Links

S&C Electric Company Positrol® - S&C "K" and S&C "T"



The Peak Demand™ Advantage

- Designed to ANSI Standards
- Stock available for just in time delivery
- 90% of orders ship within 24 hours
- Designed and engineered to meet common specifications
- Friendly team of industry veterans with decades of experience serving utility customers



Contact EnerLink for application support in Alberta, British Columbia, Yukon, and NWT
780-912-1020, hello@enerlinkcorp.com
www.enerlinkcorp.com

Peak Demand Inc. strives to keep the information in this document current and accurate. Please contact Peak Demand if there is any question as to the accuracy or completeness of the information contained in this document. Proper product selection and product application is the sole responsibility of the purchaser. Peak Demand reserves the right to discontinue any product or service at any time.

© Peak Demand Inc. All Rights Reserved.

PEAK DEMAND INC.

www.peakdemand.com

1.844.PEAK.247 | 1.844.732.5247

605 Tarboro Street Annex SW Wilson, NC 27893 USA




Selection Guide

Digit 1 - 2	Digit 3	Digit 4 - 6			Digit 7
Product	Lead Length	Amp Rating			Curve Type
FL	S	0	0	0	T
		1	1	2	K
			2	5	
			3	6	
			4	7	
			5	8	
			6		
			7		
			8		
			9		

Example part numbers: FLS100T; FLS180K

Part number digit options

Digit 3		Digit 7	
Lead Length		Curve Type	
S	Standard length = 23 inches	T	Type T fuse links are classified as "slow" with a nominal speed ratio of 12
		K	Type K fuse links are classified as "fast" with a nominal speed ratio of 7

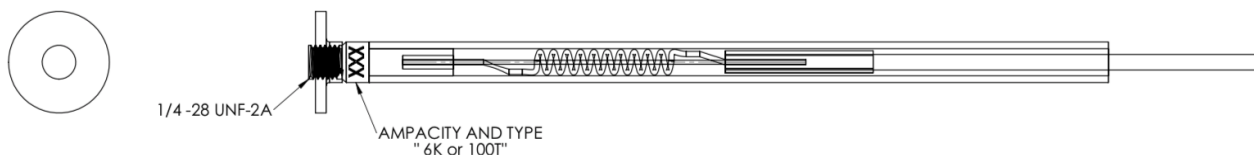

PEAK DEMAND STYLE NUMBER	AMP	TYPE	LENGTH	DESCRIPTION
FLS006K	6	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 6 AMPS, TYPE K
FLS008K	8	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 8 AMPS, TYPE K
FLS010K	10	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 10 AMPS, TYPE K
FLS012K	12	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 12 AMPS, TYPE K
FLS015K	15	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 15 AMPS, TYPE K
FLS020K	20	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 20 AMPS, TYPE K
FLS025K	25	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 25 AMPS, TYPE K
FLS030K	30	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 30 AMPS, TYPE K
FLS040K	40	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 40 AMPS, TYPE K
FLS050K	50	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 50 AMPS, TYPE K
FLS065K	65	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 65 AMPS, TYPE K
FLS080K	80	k	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 80 AMPS, TYPE K
FLS100K	100	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 100 AMPS, TYPE K
FLS140K	140	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 140 AMPS, TYPE K
FLS200K	200	K	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 200 AMPS, TYPE K
FLS006T	6	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 6 AMPS, Type T
FLS008T	8	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 8 AMPS, Type T
FLS010T	10	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 10 AMPS, Type T
FLS012T	12	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 12 AMPS, Type T
FLS015T	15	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 15 AMPS, Type T
FLS020T	20	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 20 AMPS, Type T
FLS025T	25	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 25 AMPS, Type T
FLS030T	30	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 30 AMPS, Type T
FLS040T	40	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 40 AMPS, Type T
FLS050T	50	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 50 AMPS, Type T
FLS065T	65	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 65 AMPS, Type T
FLS080T	80	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 80 AMPS, Type T
FLS100T	100	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 100 AMPS, Type T
FLS140T	140	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 140 AMPS, Type T
FLS200T	200	T	23"	FUSE LINK, REMOVABLE BOTTOM HEAD, 23" STANDARD LENGTH, 200 AMPS, Type T